


BELT FEEDER

MADE IN INDONESIA



BELT FEEDER


Belt Feeder are used for materials with characteristics fine, free flowing, non abrasive, granular and material with some lumps.

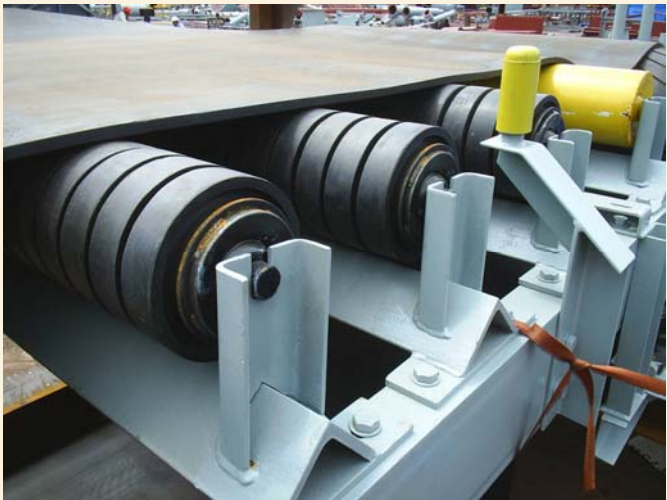


SIKO's Belt Feeders are perfect for a range of all applications, has an extremely rugged construction and specially designed to withstand the shock loading of large lumps being Dumped.

SIKO's Brand Equipment has been supplying to industrial plant in Indonesia and also other countries. We strive for high quality in everything we do, as a center of excellence.

MAIN PART of BELT FEEDER

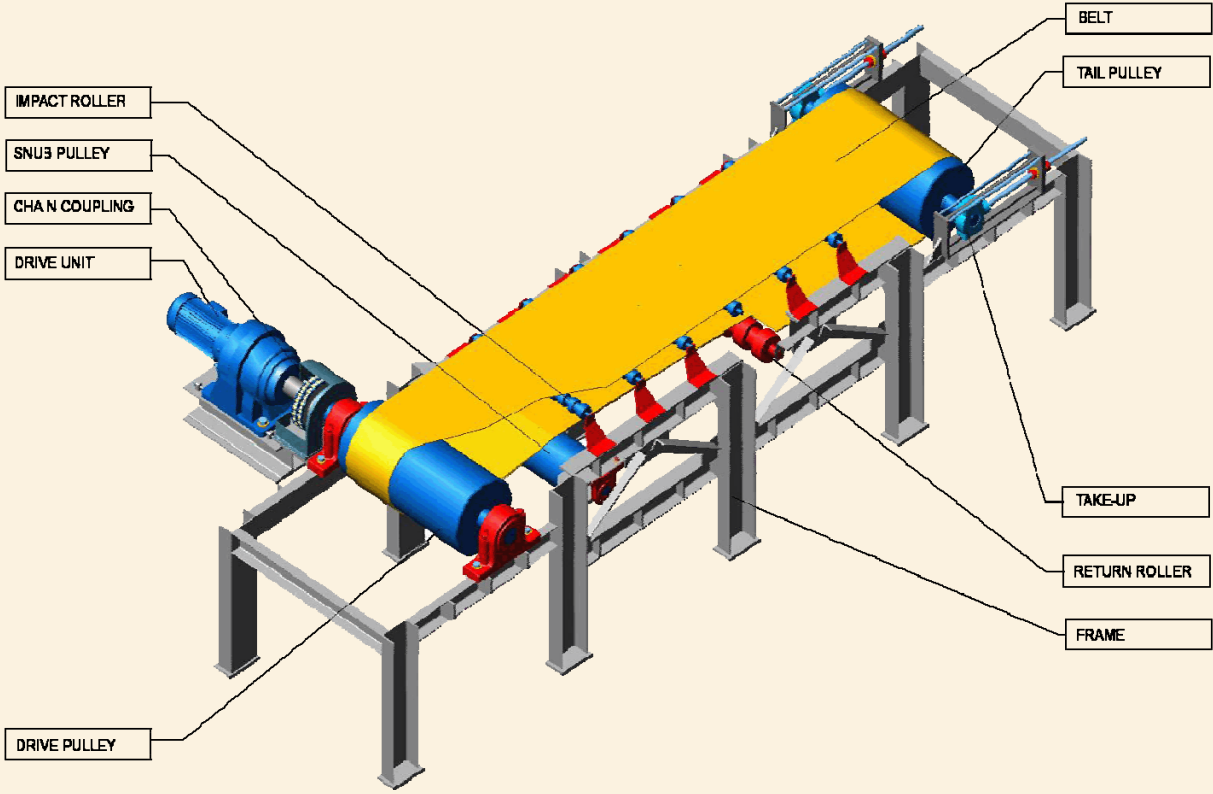

STANDARD DIMENSION

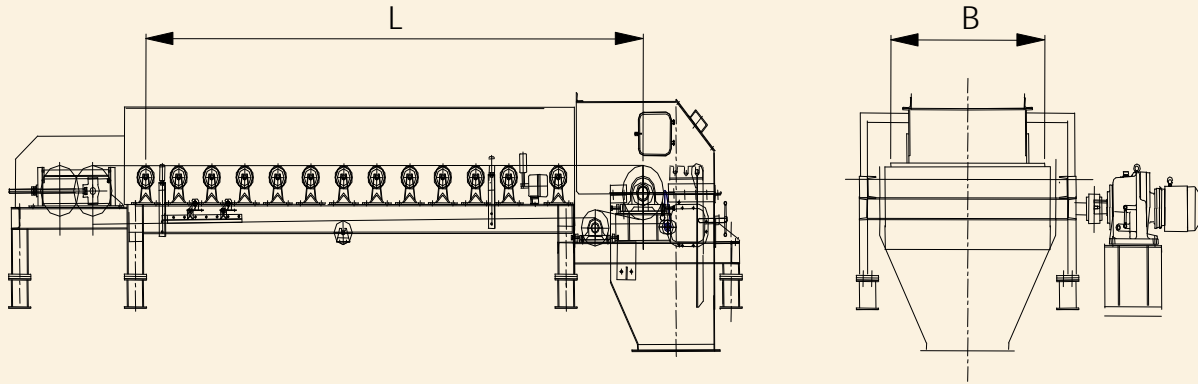


WIDTH B (mm)	LENGTH L (mm)	SPEED (m/min)	CAPACITY	POWER
			(t/h)	(kW)
600	5000	10	32	5.5
750	5000	10	54	5.5
900	5000	10	80	7.5
1050	5000	10	110	7.5
1200	5000	10	149	7.5
1400	5000	10	200	7.5

Note : Inclination (γ) : 0°, Material Density (ρ) : 1.6 t/m³

TECHNICAL DATA (to be filled out by the customer)

Capacity : t/h
 Speed : m/min
 Belt Width : mm
 Material Handled :
 Material Density : t/m³

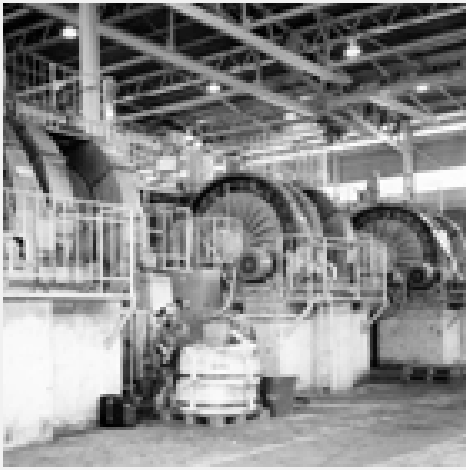

pt. cemara siko engineering indonesia

Head Office :
Gedung Mandiri Lantai 4.
Jl. Tanjung Karang No. 3-4A
Jakarta Pusat - 10230
Phone. +6221-3162540
Fax. +6221-3162542
Email : corp@siko.co.id
Website : www.siko.co.id

Project Office :
Jl. Kendal No. 7, Blora
Jakarta Pusat - 10310
Phone. +6221-3907655/56/57